



** LARGE **

ES 525 F

Capacity tons **52,5**

PRODUCT	CORN	WHEAT & BARLEY	SUNFLOWER	RAPE & SOY	RICE
INOX SCREEN	2,5	2,5	2,5	1,5	1,5
BURNER TEMPERATURE	120°	100/105°	65/70°	75/80°	45°
PRODUCT TEMP.	55/63°	45/48°	40/45°	40/45°	28/35°
PS	0,75	0,78	0,55	0,65	0,58
CAPACITY ON TONS	52,5	54,6	38,5	45,5	40,6
CAPACITY ON MC	70	70	70	70	70

LOAD TIME	CORN	WHEAT & BARLEY	SUNFLOWER	RAPE & SOY	RICE
DRYING 1½ h.	1½ h.	1¾ h.	1¾ h.	5 h.	5 h.
5 lt./t. n. 6½	4 / 4,5 lt./t. n. 7½	5/6 lt./t. n. 7	4/5 lt./t. n. 7	4 lt./t. n. 3¼	4 lt./t. n. 3¼
DRYING 2½ h.	2½ h.				
10 lt./t. n. 5½	8/9 lt./t. n. 5½				
DRYING 3½ h.	3 h.				
14 lt./t. n. 4½	10/11 lt./t. n. 5¼				
COOLING TIME	1¼ h.	1 h.	1 h.	1 h.	45'
UNLOAD TIME	17'	17'	20'	17'	45'

POWER required for:

Tractor drive PTO hp	150	150	150	150
Electric drive kw	80	80	80	80

Burner	kcal/h	1450000
Fan	Diameter	1120 mc/h 110000

DIAMETER	mt.	4,02
HEIGHT DURING TRANSPORT	mt.	4,55
HEIGHT OF CYLINDER	A mt.	8,1
OPERATING HEIGHT	B mt.	9,23

ESMA SRL - VIA VEGRI, 36 - MONTEGALDA (VI) ITALIA
 Tel. 0039 0 444 412511 Fax 0039 0 444 413230
www.esma.it skype esmasrl




mailto: info@esma.it

ESMA SRL - MONTEGALDA (VI) - ITALIA



OPERATING HEIGHT with dust	C	mt.	9,23
HEIGHT OF OUTLET CHUTE	D	mt.	6,4
LENGHT	E	mt.	7,15
LENGHT with 2,60mt loading hopper	F	mt.	10,8
LENGHT with loading auger	G	mt.	10,8
HEIGHT with electric outlet auger		mt.	
TANK		lt	
WHEELS			4
DIAMETER OF LOADIN AUGER		mm	300
DIAMETER OF CENTRAL SCREW CONVEYOR		mm	450

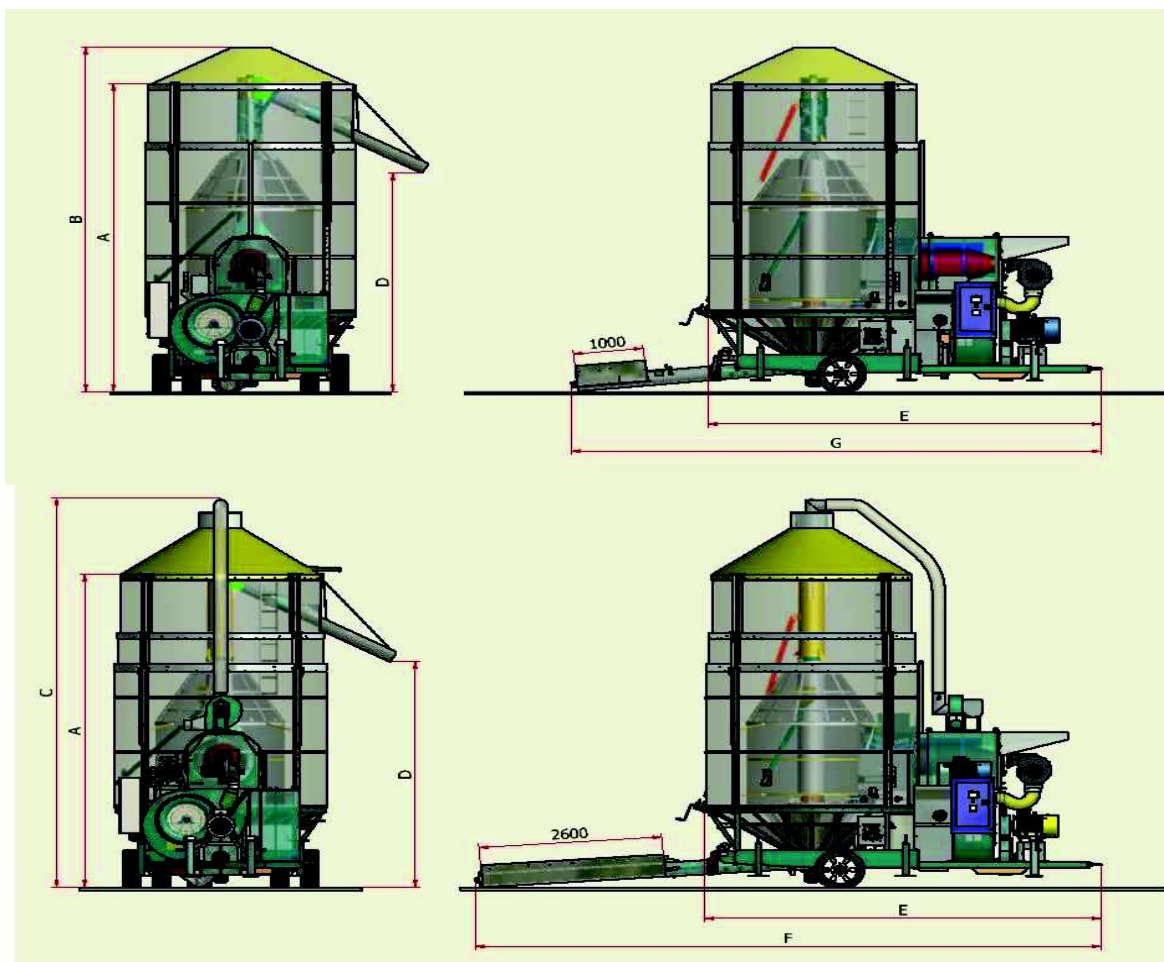

The manufacturing company may vary the data without notice. The data relevant to yields are just an indication. These can change considerably accordin to the enviroment conditions (temperature, moisture, etc) and the product characteristics (ripening degree, cleaning, etc.) Important differences are possible among the different varetetes of the same product.